

Part Number: IGN1011L500

L-Band Radar Transistor

IGN1011L500 is an internally pre-matched, gallium nitride (GaN) high electron mobility transistor (HEMT). This part is designed for L-Band radar applications operating at 1030MHz. Under ELM Mode S burst conditions it supplies a minimum of 500 watts of peak output power with 14.4dB minimum gain. Specified operation is with Class AB bias. When appropriately rated, it is operable under a wide range of pulse widths and duty factors. All devices are 100% screened for large signal RF parameters in a fixed tuned broadband matching circuit / test fixture. The use of external tuners is not allowed during screening. Not recommended for CW operation.



TYPICAL DATA

TYPICAL DATA

TYPICAL DATA

TYPICAL DATA

Lot/SN:	F (GHz)	Pi (W)	Id (A)	RL (dB)	Po (W)	Nd (%)	G (dB)	Drp (dB)	VSWR 2:1
50028210-3	1.030	18	15.53	-11.5	534	62.5	14.72	-0.34	P

Vd=55V, Idq=180mA, Pulse Burst= 48 x (32μs ON, 18μs off), 6.4%

Integra

TECHNOLOGIES, INC.

GaN on Silicon Carbide FET

- High Power Gain
- Excellent thermal stability
- Gold Metal

Depletion Mode Device

- Negative Gate Voltage to Bias
- Bias Sequencing Required
- See App Note to Prevent Damage

Gold Metal System

- Complete Gold System
- Gold Bond Wires
- Gold Package Metal
- Maximum Reliability

Class AB Operation

- Specified with AB bias

Internal Impedance Matching

- Ease of Use
- Ultra Low Loss Design

BeO Free Package

- Metal Based
- Epoxy Seal

High Power RF Test / Fixture

- Broadband
- Matched to 50 Ω (ohms)
- Long-term Correlation
- 100% Device RF Screening
- No External Tuning required

MAXIMUM RATINGS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
BD	Drain-Source Voltage	V_{DS}	--	60	V	--
BD	Gate-Source Voltage	V_{GS}	-10	0	V	--
BD	Storage Temperature Range	T_{STG}	-55	+150	°C	--
BD	Operating Junction Temperature Range	T_J	-55	+200	°C	--
BD	CW Power	P_{CW}	--	250	W	--
Note	Screen 'BD' = parameter qualified By Design.					

THERMAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
BD	Thermal Resistance	$R_{TH(JC)}$	--	TBD	°C/W	$V_{DD}=V1, I_{DQ}=I_{DQ1}, \text{Pulse Burst, DF=DF1, } T_F=25\pm5^\circ\text{C, } P_{OUT}=500\text{W}$
Note	Screen 'BD' = parameter qualified By Design.					

PROCESSING SPECIFICATIONS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	DC Wafer Probe	--	--	--	--	Per Integra specification.
Q1	Wafer DC and RF Qualification	--	--	--	--	Per Integra specification.
LM	Wire Bond Strength	--	--	--	--	Line monitor per Integra specification.
100%	Pre-cap visual inspection	--	--	--	--	Per Integra specification
100%	Gross leak test	--	--	--	--	MIL-STD-750D, Method 1071.6, Test Condition C
Note	Screen 'Q1' = parameter is qualified by assembly and test of 3 pieces minimum per wafer.					
Note	Screen 'LM' = parameter is qualified by assembly line monitor.					

DC ELECTRICAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Typ	Max	Units	Test Conditions
100%	Drain Leakage	I_{DSS}	--	21	15	mA	$V_{DS} = 50\text{V, } V_{GS} = -8\text{V, } T_F = 25\pm5^\circ\text{C}$
100%	Threshold Voltage	V_{GS-TH}	-4	-2.8	-2.5	V	$V_{DS} = 50\text{V, } I_D=100\text{mA, } T_F = 25\pm5^\circ\text{C}$
BD	Gate Leakage Current	I_{GSS}	--	--	5	mA	$V_{DS} = 50\text{V, } V_{GS} = -8\text{V, } T_F = 25\pm5^\circ\text{C}$
BD	Threshold Voltage	B_{VDSS}	80	--	--	V	$I_{DS}=60\text{mA, } V_{GS} = -8\text{V, } T_F = 25\pm5^\circ\text{C}$


RF ELECTRICAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Typ	Max	Units	Test Conditions
100%	Input Return Loss	IRL	-20	-12	-10	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}$, Pulse Burst, $DF=DF1, T_F=T_{F1}, P_{IN}=P_{IN1}, F=F1$.
100%	Power Gain	Gp	14.44	14.80	16.44	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}$, Pulse Burst, $DF=DF1, T_F=T_{F1}, P_{IN}=P_{IN1}, F=F1$.
100%	Drain Efficiency	N_D	60	63	75	%	$V_{DD}=V1, I_{DQ}=I_{DQ1}$, Pulse Burst, $DF=DF1, T_F=T_{F1}, P_{IN}=P_{IN1}, F=F1$.
100%	Pulse Amplitude Droop	D	-0.7	-0.4	0.30	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}$, Pulse Burst, $DF=DF1, T_F=T_{F1}, P_{IN}=P_{IN1}, F=F1$.
100%	Output Power	Po	500	544	793	W	$V_{DD}=V1, I_{DQ}=I_{DQ1}$, Pulse Burst, $DF=DF1, T_F=T_{F1}, P_{IN}=P_{IN1}, F=F1$.
100%	2:1 Load Mismatch Stability	VSWR-S	2:1	--	--	--	$V_{DD}=V1, I_{DQ}=I_{DQ1}$, Pulse Burst, $DF=DF1, T_F=T_{F1}, P_{IN}=P_{IN1}, F=F1$, Rotate 2:1 output VSWR through 360° phase. No oscillatory or pulse break-up characteristics allowed on detected output pulse. All non-harmonically related signals must be at least -65 dBc.
100%	2:1 Load Mismatch Tolerance	LMT	2:1	--	--	--	$V_{DD}=V1, I_{DQ}=I_{DQ1}$, Pulse Burst, $DF=DF1, T_F=T_{F1}, P_{IN}=P_{IN1}, F=F1$, Rotate 3:1 output VSWR through 360° phase. Post test $P_O =$ Pre test $P_O \pm 5W$
Note 1	$V1 = 55V; I_{DQ1} = 180mA$; Pulse Burst = 48 x (32µs ON, 18µ off), $DF1 = 6.4\%$, $P_{IN1} = 18W$.						
Note 2	Test Frequencies: $F1 = 1.030GHz$.						
Note 3	$T_{F1} = 25 \pm 5^\circ C$ = Device flange temperature.						
Note 4	Screen 'BD' = parameter qualified By Design.						

RF TEST FIXTURE IMPEDANCE CHARACTERISTICS

Frequency (GHz)	$Z_{IF} (\Omega)$	$Z_{OF} (\Omega)$
1.030	0.80 – j0.90	3.05 – j2.45
Impedance Definition		

PACKAGE DIMENSIONAL OUTLINE DRAWING

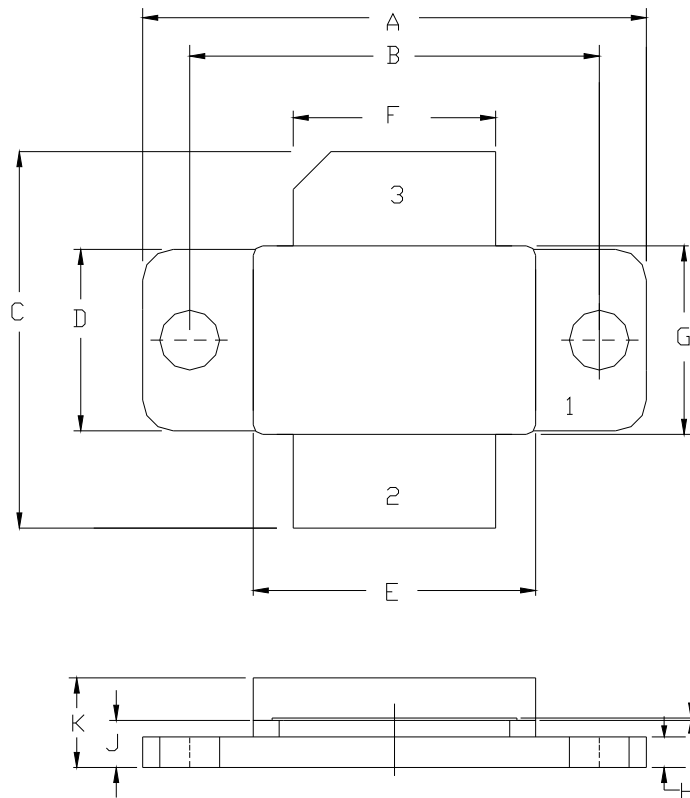


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.065	1.075	27.05	27.30
B	0.865	0.875	21.97	22.22
C	0.794	0.804	20.17	20.42
D	0.380	0.390	9.65	9.90
E	0.595	0.605	15.11	15.37
F	0.425	0.435	10.79	11.05
G	0.395	0.405	10.03	10.29
H	0.060	0.070	1.52	1.78
I	0.004	0.006	0.10	0.15
J	0.096	0.106	2.44	2.69
K	0.184	0.196	4.67	4.98

PIN SCHEDULE	
1	BASE
2	EMITTER
3	COLLECTOR

LID-P64-1

RF TEST FIXTURE

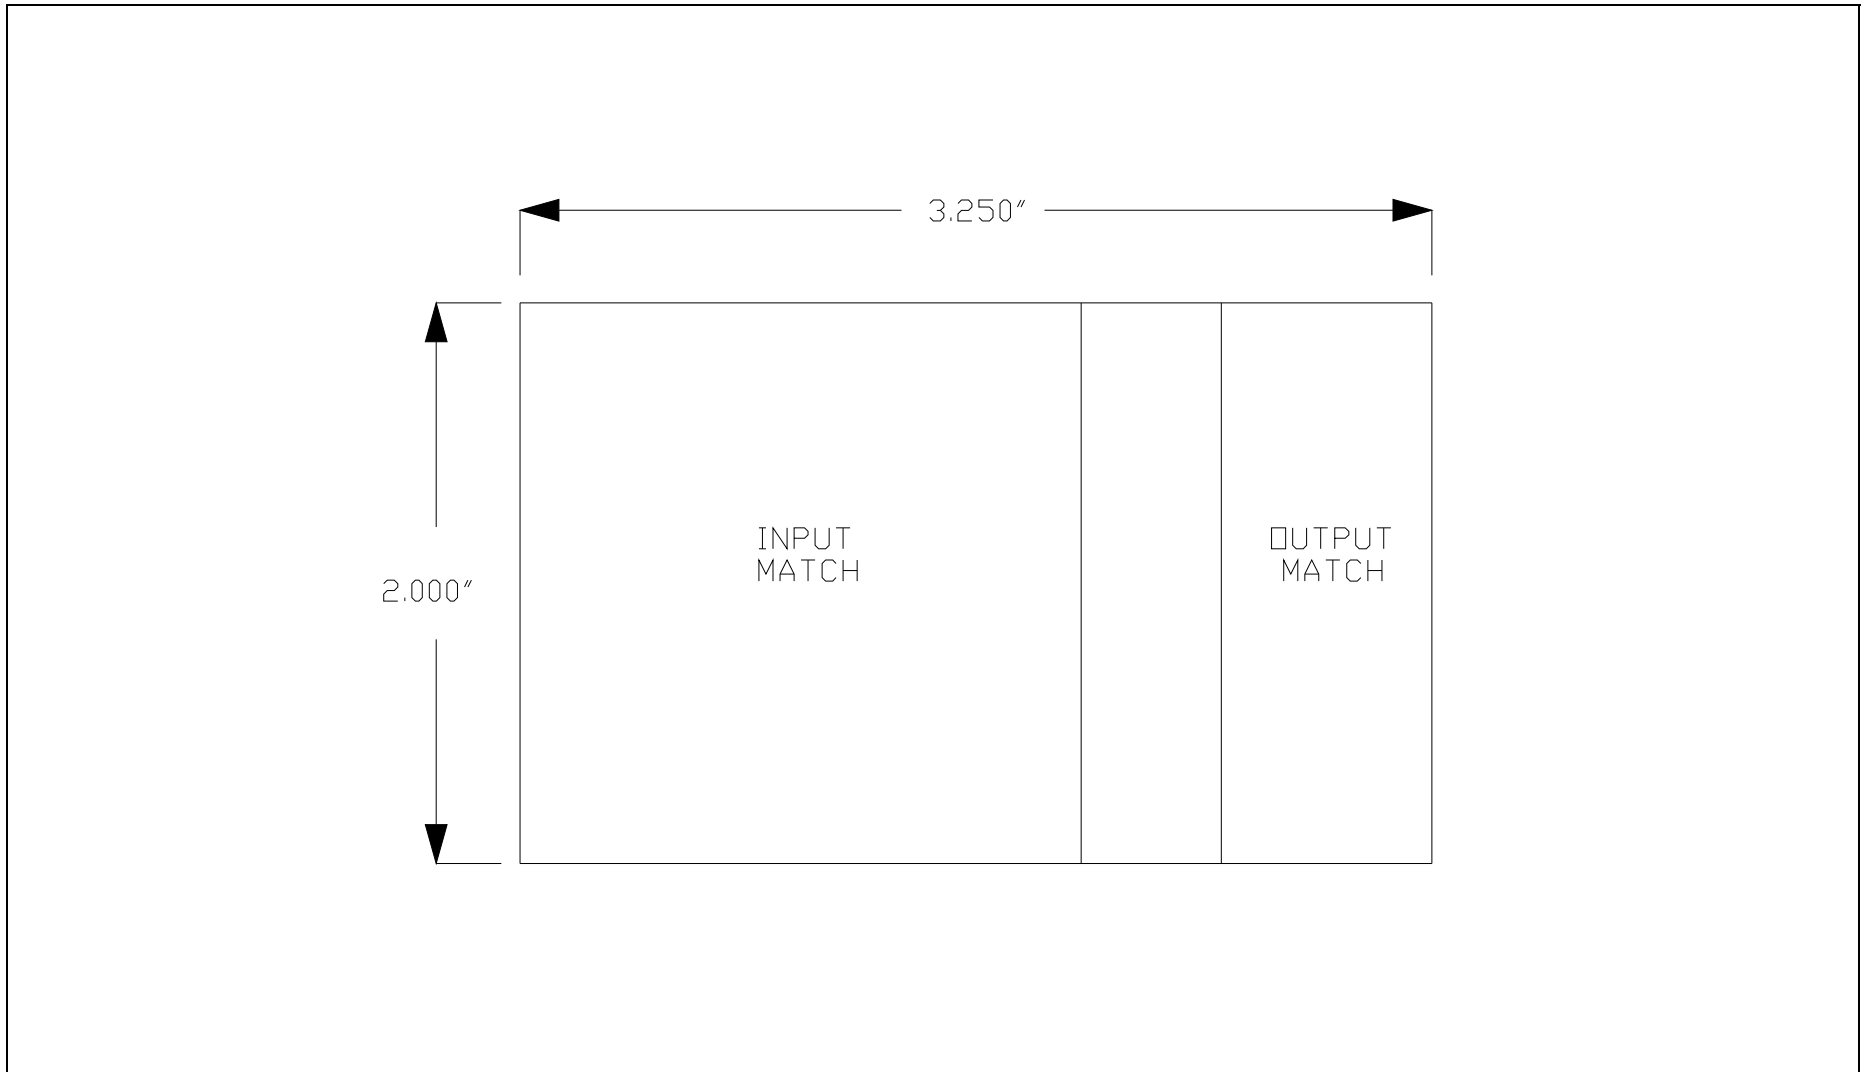

CONTACT FACTORY FOR RF TEST FIXTURE CAD DRAWING WITH CIRCUIT DIMENSIONS

DEFINITIONS

Data Sheet Status	
Proposed Specification	This data sheet contains proposed specifications.
Preliminary Specification	This data sheet contains specifications based on preliminary measurements and data.
Product Specification	This data sheet contains final product specifications.
Maximum Ratings	
Stress above one or more of the maximum ratings may cause permanent damage to the device. These are maximum ratings only operation of the device at these or at any other conditions above those given in the characteristics sections of the specification is not implied. Exposure to maximum values for extended periods of time may affect device reliability.	

DISCLAIMER

Integra Technologies Inc. makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Integra Technologies Inc. assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Integra Technologies Inc. products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Integra Technologies Inc. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Integra Technologies Inc. for any damages resulting from such improper use or sale.